


Materiality and Landscape Character

The material palette for Proctor Landing Park is intended to reinforce the project's identity as a flood-adaptive public landscape. Materials are selected not only for durability and constructability, but for the character they give each part of the park. Across the site, the palette balances civic clarity in active public zones with warmer, more natural expression in ecological and restorative areas.

CATEGORY	ELEMENTS	CHARACTER
 Hardscape	 Accessible paving, unit paving, textured paving / cobble	 Durable, legible, civic, tactile
 Structures + Furnishings	 Timber decking, timber seating, light steel structures, railings / guards	 Warm, durable, open, restrained
 Softscape + Planting	 Canopy trees, understory planting, wetland planting, mulch / soft paths	 Cooling, layered, adaptive, immersive

SMALL CALLOUT LABELS

 Civic paving language	 Warm timber elements	 Flood-aware edge details	 Layered planting structure	 Shaded social character	 Immersive ecological materiality
--	---	---	---	---	---

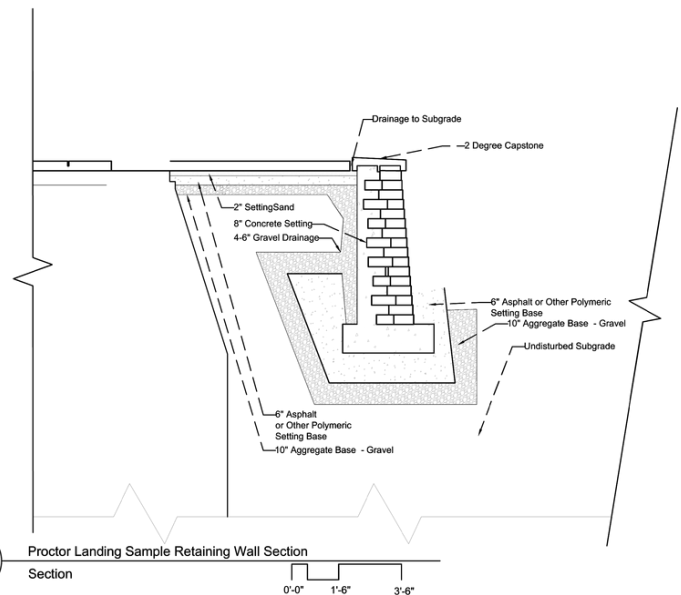

This material language helps unify the park while allowing different spaces to feel distinct. Paved and structured elements support legibility of use intentions, possibilities, access, and repeated use in social and active zones, while timber, planting, and softer edge conditions create a more immersive and restorative character within wetland, woodland, and riparian areas.

Woodland, Upland and Wetland Planting Designs

The planting strategy organizes the park into three connected landscape zones: woodland canopy, wetland core, and creek-edge crossing. Together, these zones give Proctor Landing Park its quieter and more restorative character. Woodland paths, bird blinds, contemplative seating areas, layered canopy, and shaded understory planting create spaces for slower movement, habitat observation, and mental restoration. These areas are intentionally immersive and low-profile, allowing shade, texture, seasonal change, and wildlife activity to become the primary experience.



Across the year, the planting zones give the park a changing identity. Spring brings emerging wetland growth, flowering understory plants, and increased bird activity. Summer emphasizes shade, cooling, habitat density, and protection from heat. Fall adds color, seed heads, grasses, and richer woodland texture. Winter reveals structure through trunks, boardwalks, stone edges, evergreen massing, and open views across the floodplain. This seasonal rhythm keeps the ecological areas visually active and useful beyond peak recreation months.




Planting Selection Note

The species shown here represent a focused sample from a larger planting matrix. Each zone is supported by a spreadsheet of approximately 20–30 candidate species selected for site fit, seasonal interest, ecological function, maintenance needs, and flood or sun tolerance. This allows the planting design to remain flexible while still maintaining a clear ecological identity for each zone.

Woodland, Upland and Wetland Planting Designs

1 HEAVY CANOPY / WOODLAND

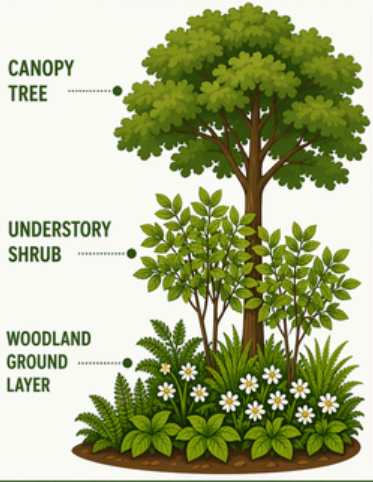	TREES • White oak (<i>Quercus alba</i>) • Tuliptree (<i>Liriodendron tulipifera</i>) • Serviceberry (<i>Amelanchier arborea</i>) • American hornbeam (<i>Carpinus caroliniana</i>) SHRUBS • Spicebush (<i>Lindera benzoin</i>) • Witch hazel (<i>Hamamelis virginiana</i>) GROUND LAYER • Pennsylvania sedge (<i>Carex pensylvanica</i>) • Wild ginger (<i>Asarum canadense</i>) • Foamflower (<i>Tiarella cordifolia</i>) • Solomon's seal (<i>Polygonatum biflorum</i>)	KEY VALUES • Shade and cooling • Woodland habitat structure • Spring and fall seasonal interest • Soil stability and leaf-litter ecology
--	--	---

The woodland zone builds a shaded, immersive edge for the park, using canopy trees, understory shrubs, and a layered ground plane to create cooler walking spaces and habitat structure. In spring and fall, flowering understory plants, leaf color, and woodland texture give this zone strong seasonal identity, while summer shade supports comfort, rest, and slower movement.

The upland planting zone brings color, pollinator value, and visual energy to the park's more active areas. Durable sunny plantings, flowering shrubs, grasses, and seasonal blooms frame paths, gathering spaces, and open lawn edges while staying resilient and manageable over time.

2 Managed Planting / Upland

	TREES • Eastern redbud (<i>Cercis canadensis</i>) • Black gum (<i>Nyssa sylvatica</i>) • Kentucky coffeetree (<i>Gymnocladus dioica</i>) SHRUBS • Ninebark (<i>Physocarpus opulifolius</i>) • New Jersey tea (<i>Ceanothus americanus</i>) • Black chokeberry (<i>Aronia melanocarpa</i>) GROUND LAYER • Prairie dropseed (<i>Sporobolus heterolepis</i>) • Little bluestem (<i>Schizachyrium scoparium</i>) • Purple coneflower (<i>Echinacea purpurea</i>) • Black-eyed Susan (<i>Rudbeckia hirta</i>) • Butterfly milkweed (<i>Asclepias tuberosa</i>) • Wild bergamot (<i>Monarda fistulosa</i>)	KEY VALUES • Pollinator support • Durable sunny planting • Seasonal color and texture • Low-to-moderate maintenance
--	---	--

3 WETLAND / RIPARIAN

	TREES • American sycamore (<i>Platanus occidentalis</i>) • River birch (<i>Betula nigra</i>) • Bald cypress (<i>Taxodium distichum</i>) • Swamp white oak (<i>Quercus bicolor</i>) SHRUBS • Red osier dogwood (<i>Cornus sericea</i>) • Silky dogwood (<i>Cornus amomum</i>) • Buttonbush (<i>Cephalanthus occidentalis</i>) WETLAND LAYER • Soft rush (<i>Juncus effusus</i>) • Tussock sedge (<i>Carex stricta</i>) • Blue flag iris (<i>Iris versicolor</i>) • Swamp milkweed (<i>Asclepias incarnata</i>) • Cardinal flower (<i>Lobelia cardinalis</i>) • Joe-Pye weed (<i>Eutrochium purpureum</i>)	KEY VALUES • Water filtration • Bank stability • Flood tolerance • Habitat and nectar resources
--	---	--

The wetland and riparian zone forms the ecological heart of the site, turning flood-prone ground into habitat, filtration, and public experience. Water-tolerant trees, shrubs, wetland plants, and creek-edge vegetation stabilize banks, support wildlife, and create a changing seasonal landscape of water, texture, bloom, and movement.

Site Metrics & Area Takeoffs

This metrics overview translates the proposal into measurable site outcomes across access, ecology, recreation, planting, and visitor support. Together, the tables show how Proctor Landing Park shifts from an underused floodplain landscape into a more connected, resilient, and active public park.

Spatial + Ecological Metrics

Quantified landscape systems and environmental change

Metric	Existing	Proposed	Net Change	Performance Read
Total site area	61.63 ac	61.63 ac	0	Overall project footprint
Canopy cover	16.99 ac (740,000 sf)	22.50 ac (980,000 sf)	+5.51 ac (+240,000 sf)	Expanded shade, habitat, and heat relief
Constructed wetland system	—	15.68 ac (683,139 sf)	+15.68 ac	Flood storage, habitat, and water treatment
Open water / pond area	19,714 sf	34,250 sf	+14,536 sf (+73.7%)	Added storage and visual amenity
Open field / exercise loop area	—	8.91 ac (387,951 sf)	+8.91 ac	Flexible recreation and mobility
Boardwalk footprint	0 sf	6.61 ac (287,722 sf)	+6.61 ac	Immersive access to riparian wetlands

Access + Recreation Metrics

Mobility, programmed recreation, and arrival systems

Metric	Existing	Proposed	Net Change	Performance Read
Accessible path network	—	33,731 lf (6.39 mi)	+33,731 lf	8-ft average-width trail system
Boardwalk network	0 lf	23,977 lf (4.54 mi)	+23,977 lf	12-ft-wide elevated circulation
Total circulation network	—	57,708 lf (10.93 mi)	—	Combined trails and boardwalks
Formal active recreation area	—	8.72 ac (380,051 sf)	+8.72 ac	Sports fields plus splash pad
Splash pad / civic hardscape	0 sf	14,051 sf	+14,051 sf	Cooling, play, and civic gathering
Sports field package	—	15 fields / courts	+15 amenities	2 soccer, 4 tennis, 3 volleyball, 1 baseball, 2 futsal, 3 basketball
Play spaces	—	6	+6	Multi-age informal play
Exercise stations	—	9	+9	Distributed fitness nodes
Parking capacity	—	85 spaces	+85 spaces	Supports daily use and event access



Key reads: 10.93 mi total circulation | 15 sports courts / fields | 85 parking spaces

Dashes indicate baseline not quantified or not directly comparable.

Area takeoffs were used to quantify the master plan beyond visual layout. Planting zones, canopy expansion, wetland areas, circulation, active recreation, passive open space, and social gathering areas were measured to evaluate how the design performs spatially. These takeoffs help connect design intent to measurable outcomes, including ecological coverage, recreational access, flood-adaptive land use, and public health value.

Collecting area takeoff data gives the master plan a measurable foundation. It helps show that the design is not only visually organized, but also performing as a system. By quantifying planting coverage, circulation, recreation space, canopy, wetlands, and gathering areas, the project can connect design decisions to ecological value, public health benefits, maintenance needs, and long-term resilience.

Planting + Support Amenities

Comfort, stewardship, and day-to-day park support

Metric	Existing	Proposed	Net Change	Performance Read
New trees planted	Existing canopy retained	1,500 trees	+1,500	Major canopy expansion and structure
New shrubs planted	Existing vegetation retained	6,000 shrubs	+6,000	Layered understory and habitat value
Total new woody plants	—	7,500 plants	+7,500	Approximately 122 plants per acre
Seating elements	Minimal	~120 elements	+~120	Benches, bleachers, and social seating
Shade structures	Minimal	25 structures	+25	Comfort, cooling, and event support
Restroom facilities	0	2	+2	Basic visitor support infrastructure
Trash receptacles	0	28	+28	Distributed maintenance coverage
Bike stations with repair	0	3	+3	Supports multimodal access



Key reads: 7,500 new woody plants | ~120 seating elements | 25 shade structures

Pro Forma Structure & Planning Cost Anchors

This pro forma framework converts the master plan into measurable quantities and cost elements. The tables below provide the systems, metrics, and planning-level cost ranges used to develop conceptual estimates for Proctor Landing Park.

 **TABLE 1 | PRO FORMA STRUCTURE**

Master Plan System	Best Metric	Cost Association
 Site prep, grading, drainage	Acres, CY, LF	Earthwork, floodplain grading, drainage structures, erosion control
 Primary loop / accessible paths	SF or LF × width	Asphalt or concrete paving, aggregate base, subgrade prep
 Secondary paths	LF or SF	Crushed stone, stabilized fines, mulch, or low-impact surfacing
 Boardwalks + overlooks	SF + railing LF	Timber/metal structure, piers, railings, wetland access
 Paddy Creek crossing	LS + LF/SF	Culvert path work, boardwalk connector, railings, stone edge, safety elements
 Wetland / riparian restoration	Acres, SF, CY	Excavation, hydrology, wetland plugs, erosion control, bank stabilization
 Heavy canopy / woodland	Acres + tree count	Canopy trees, understory shrubs, woodland ground layer
 Managed upland planting	SF or acres	Pollinator planting, grasses, shrubs, seasonal planting beds
 Splash pad + fountain zone	SF + LS	Rubber/concrete surfacing, spray systems, pumps, plumbing, fountain basin
 Play / gathering zone	SF + equipment LS	Play structures, resilient surfacing, seating, shade
 Exercise loop	Equipment count + SF	Fitness stations, surfacing, signage, shade/canopy support
 Site furnishings	EA	Benches, tables, trash, bike racks, drinking fountains
 Lighting + signage	EA or LF	Fixtures, conduit, wayfinding, interpretive signage
 Design / permitting / soft costs	%	LA/engineering, survey, permits, review, bidding support

 **TABLE 2 | PLANNING-LEVEL COST ANCHORS**

Item	Planning Range
 Concrete walk / plaza	About \$8–13/SF based on Ohio sidewalk bid examples and ODOT sample estimating data
 Asphalt paving	About \$7–13/SF as a broad installed planning range; verify locally
 Boardwalk	About \$70–150/SF installed for commercial boardwalk work
 Splash pad	Often \$250K–\$1.5M+ depending on size, utilities, and water system
 Outdoor fitness zone	Roughly \$80K–\$160K+ for a medium municipal setup
 Playground / play zone	Often \$175K–\$600K+ depending on scale, surfacing, accessibility, and equipment complexity
 Native seed / meadow areas	About \$500–\$1,200/acre for prairie seed before full installation, prep, and maintenance
 Trees	Use EA pricing by size; professional planting varies widely by tree size, site access, and installation needs

	=		+		+		+		+		=	
Quantity × Unit Cost		Direct Cost		Mobilization		Contingency (20–30%)		Soft Costs (Design, Permitting, Survey, etc.)		Escalation		Planning-Level Total
For this stage, use 20–30% contingency because the design is still conceptual.												

Phasing and Implementation Timeline

Proctor Landing Park is intended to be implemented in phases so that the most essential landscape systems are built first. This approach prioritizes access, ecological stabilization, and public usability before layering in more specialized amenities and long-term enhancements. Phasing also allows funding, stewardship, and partnerships to build over time rather than requiring the park to be realized all at once.

The sequencing is based on value and dependency. Core circulation, grading, drainage, stabilization, and foundational planting create the base conditions that make the rest of the park possible. Once those systems are in place, active destinations, civic amenities, and specialty features can be added in ways that expand public use while protecting the long-term resilience of the site.



PHASE	FOCUS	MAJOR ACTIONS	TIMELINE	PRIMARY BENEFIT
 Phase 1 Framework + Stabilization	 Build the framework access, grading, circulation, drainage, stabilization.	- grading, drainage, - erosion control, - primary loop, - accessible paths, - initial planting, - foundational wetland work	 Years 1–2	 access, safety, resilience
 Phase 2 Core Destinations	 Establish the landscape systems wetlands, planting, erosion control, canopy.	- ecological core boardwalks, - key gathering spaces, - active recreation zones, - shade structures, - splash pad, dog park	 Years 2–4	 public use, identity, repeat visitation
 Phase 3 Expansion + Enhancement	 Layer in destination features active amenities, structures, social spaces, specialty elements.	- woodland features, bird blinds, - expanded planting, - interpretive features, - additional furnishings, - refinement of secondary spaces	 Years 4–6	 ecological maturity, comfort, experience
 Phase 4 Stewardship + Monitoring		- maintenance agreements, - volunteer programs, - performance tracking, - adaptive improvements, - replacement cycles	 Ongoing	 longevity, adaptability, care

Add the spaces that create the strongest public draw next ecological core, active destinations, gathering areas. Layer in specialty features as the park matures habitat features, interpretive elements, expanded amenities.